

Order No.	500005119
Model No.	SEN50 (Vital Sense 50 inch)
Notes:	

# Section 10309 - Manufactured Electric Fireplaces

## PART 1 GENERAL

## 1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces.
- B. Accessories

### 1.2 RELATED SECTIONS

A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure.

## 1.3 REFERENCES

- A. UL 2021
- B. CSA C22.2 No. 46

## 1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
  - 1. Preparation instructions and recommendations.
  - 2. Storage and handling requirements and recommendations.
  - 3. Installation methods.
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

## 1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

## 1.6 WARRANTY

A. Provide the manufacturer's 1-year limited warranty on electrical components.

## PART 2 PRODUCTS

## 2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
  - Base: Dimplex Electric Fireplace Glen Dimplex Americas

1367 Industrial Road

Cambridge ON N3H 4W3

1-888-346-7539

www.dimplex.com

- 2. Substitutions not permitted
- Requests for substitutions will be considered in accordance with provisions of Section 01600.



Order No.	500005119
Model No.	SEN50 (Vital Sense 50 inch)
Notes:	

## Section 10309 - Manufactured Electric Fireplaces

## 2.2 ELECTRIC FIREPLACES

### A. General:

- 1. Provide all components and accessories required for a complete, functional unit.
- 2. cULus listed, file E71416

## B. Pre-fabricated Electric Fireplace:

- 1. Base Product:
  - a) Dimplex Vital Sense Linear Electric Fireplace
  - Material Number: 500005119
  - Regulatory model number: 691670xxxx?
- 2. Description: Realistic 50" linear electric fireplace
- 3. Dimensions:
  - Width: 50-3/8" / 127.9 cm b) Height: 19-1/2" / 49.4 cm c) Depth: 7-1/8" / 18.1 cm
- 4. Framing Dimensions:
  - a) Width: 48-7/8" / 124.1 cm b) Height: 18-1/2" / 46.9 cm
  - c) Depth: 9" / 23.0 cm
- 5. Weight:
  - Product Weight: 61.6 lbs / 28 kg a) b) Packaged Weight: 88 lbs / 40 kg
- 6. Electrical:
  - a) Volts: 120 V b) Watts: 1500 W c) BTUs: 5000 d) Amps: 12.5
- 7. Venting: Non-venting
- 8. Operation: Flame only, flame and heat
- 9. Heating: Louver-less, fan-forced circulation
- 10. Liner: Steel
- 11. Standard features:
  - A new multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of seven presets
  - Ambient Light Sensor automatically adjusts firebox light to suit the room or can be customized with a range of preset colors



Order No. 500005119

Model No. SEN50 (Vital Sense 50 inch)

Notes:

# Section 10309 - Manufactured Electric Fireplaces

- c) The multi-media bed includes tumbled glass
- d) LED flame technology
- e) Hard wire capabilities 120V plug kit included
- f) Built-in touch controls
- g) Built-in Timer Set for up to 8 hours
- h) Seamless installation and edge to edge glass

## 12. Control options:

- a) Glen Dimplex Connect app connectivity
- b) Multi-function remote control
- c) Built-in hidden controls (Heat on/off, thermostat, brightness, flame theme)

## 13. Optional Accessories:

a) Realistic log set Material No. 500005655

## PART 3 EXECUTION

#### 3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

## 3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

## 3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.
- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).
- E. To use the mobile app, install where a WiFi connection is available.

## 3.4 PROTECTION


- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.





## **Product Dimensions:**

**TOP - NO TRIM** 7-1/8" (18.1 cm)

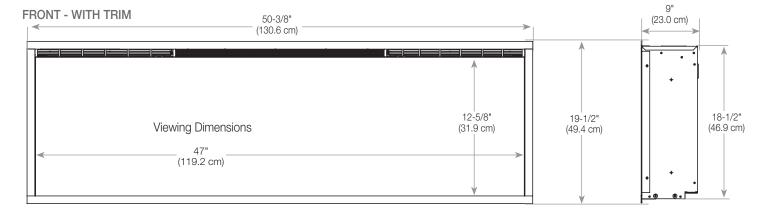

## Framing / Installation:

**NOTE:** Two people are required for installation.

Prepare a wall with a framed opening, following the dimensions shown in Figure at right.

**A** CAUTION: Decorative finishing material (such as brick) should be limited to ½" (13 mm) overhang to ensure adequate flow of heated air out of the firebox area.

**CAUTION:** This fireplace is NOT load-bearing. Ensure the opening for the fireplace is framed in such a way that the weight of the building materials will not create pressure on the top of the fireplace.

NOTE: This fireplace can also be wall mounted with brackets included (see below). Ensure it is supported by wall studs.

